



Advantages

- Fast. Dries in just 10 seconds.
- Hygienic.
- Energy efficient.
- Environmentally friendly.
- Reduced CO₂ emissions.
- Automatic operation. Controlled by an intelligent infrared sensor that automatically turns the unit on and off.
- CPU controlled brushless motor (no carbon brushes).
- Large LCD display indicating the process and drying time.
- Easy to clean and maintain. Easy access to water collection tray.
- Robust, impact-resistant casing.
- Economic and durable.
- Intelligent, practical and elegant design.
- Air intake filter.

How it works

1 Insert your hands in the slot. If you do not place your hands deep enough inside the slot, the LCD display will light up and indicate that you need to place your hands further inside.

2 The LCD display will show a picture of a fan and the device will start to dry your hands. The timer will count from 0 to 10 seconds. The air will dry the water from your hands and the device will then stop automatically.

3 Slowly remove your hands from the slot. The device will stop automatically.



S&P Sistemas de Ventilación, S.L.U.
C/Llevant, 4 - Pol. Ind. Llevant
08150 Parets del Vallès (Barcelona)
www.solerpalau.com

NOT EVEN A DROP

HAND DRYER ECOHAND

The fast, hygienic and energy efficient hand drying system.

The Ecohand hand dryer uses a powerful, high-speed layer of clean air to eliminate every drop of water from the hands, leaving them dry in just 10 seconds. The innovative design prevents water droplets from falling to the ground, guaranteeing higher standards of hygiene.

Energy consumption Energy savings comparison

Use per day	ECOHAND hand dryer annual energy consumption	Traditional hand dryer annual energy consumption	Annual energy savings	Energy savings over 5 years
500 (Times)	430 (kW)	4.055 (kW)	3.625 (kW)	18.125 (kW)
1.000 (Times)	860 (kW)	8.111 (kW)	7.251 (kW)	36.255 (kW)
1.500 (Times)	1.290 (kW)	12.166 (kW)	10.876 (kW)	54.380 (kW)
2.000 (Times)	1.720 (kW)	16.222 (kW)	14.502 (kW)	72.510 (kW)

N.B.
The Ecohand hand dryer has been tested at 850W power, with an average drying time of 10 seconds on each occasion. A traditional 2000W hand dryer takes an average drying time of 40 seconds on each occasion.


Technical characteristics ECOHAND

Nominal voltage	220-240V 50 Hz
Nominal power	850 W
Nominal current	6,5 A
Degree of protection	IP22
Insulation	Class I
Airflow	150 m³/h
Air speed	86 m/s
Sound level	80 dB
Dimensions	650 x 292 x 250 mm
Weight per unit	11 kg
Colour	White

Brushless DC electric motor: long service life. Efficient and stable operation, generating less waste since it does not require the use of carbon brushes. Providing energy savings of up to 90% in comparison with tradition hand dryers and so helping to protect the environment.

HAND DRYER SL-2002

Warm air hand dryer.
Push button activated or
photo-electric cell versions.

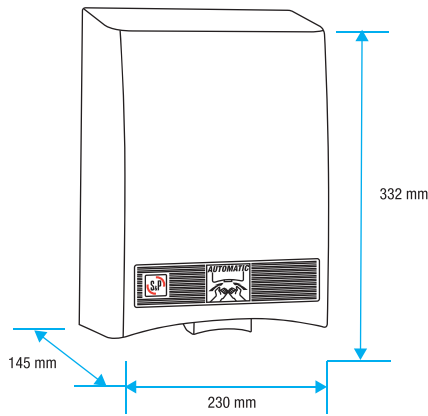

SL-2002



SL-2002 AUTOMATIC / ALUMINIUM

Advantages

- Thermal protection in motor and heater.
- Easy installation.

SL-2002 MODEL

- Activation by push button.
- Automatic stop after 45 seconds.
- Polycarbonate casing.
- White colour.

SL-2002 AUTOMATIC / SL-2002 AUTOMATIC ALUMINIUM MODEL

- Activation by photo-electric cell.
- Stops automatically when hands are removed.
- Casing available in polycarbonate (SL 2002 model) or in aluminium (SL 2002 AUTOMATIC ALUMINIUM model)
- White colour.

SL-2002 A SILVER MODEL

- Activation by photo-electric cell.
- Stops automatically when hands are removed.
- Polycarbonate casing.
- Silver colour.




SL-2002 A SILVER

Technical characteristics

Nominal voltage	230V 50Hz
Nominal power	1875 W
Degree of protection	IP X1
Insulation	Class II
Airflow	170 m³/h
Sound level at 1.5 m	52 dB(A)
Dimensions	230 x 145 x 332 mm
Weight	2,8 kg
	3,8 kg (ALUMINIUM model)

HAND DRYER SL-2008 / SL-2008 AUTOMATIC

Elegant warm air hand dryer.
Push button activated or photo-electric
cell versions.

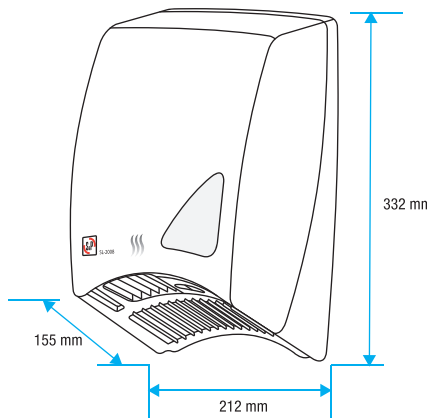

Advantages

Hand dryers for applications that demand
an elegant design.

- Polycarbonate casing.
- Thermal protection in motor and heater.
- Easy installation.

SL-2008 MODEL

- Activation by push button.
- Automatic operating time.
- Automatic stop after 45 seconds.
- White colour.

SL-2008 AUTOMATIC / SL-2008 AUTOMATIC SILVER MODEL

- Activation by photo-electric cell.
- Safety system that prevents continued operation of the unit in case an object was placed below.
- Stops automatically when hands are removed.
- White colour (SL-2008 AUTOMATIC model) and silver colour (SL-2008 A SILVER model)


Technical characteristics

Nominal voltage	230V 50Hz
Nominal power	1875 W
Degree of protection	IP X1
Insulation	Class II
Airflow	170 m³/h
Sound level at 1.5 m	52 dB(A)
Dimensions	332 x 212 x 155 mm
Weight	2,8 kg



HAND DRYER SL-2500N/SL-2500N A

Highly effective and elegant warm air hand dryer.
Push button activated or photo-electric cell versions.

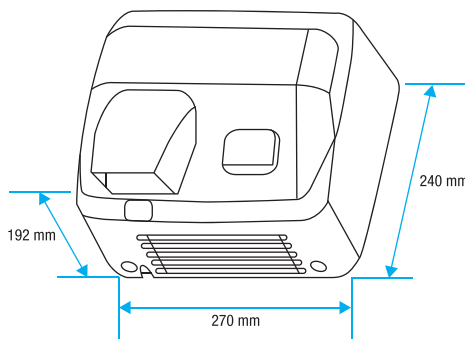

Advantages

SL-2500N / SL-2500N A

Hand dryers for applications that demand a
safe and robust design.

- Vandal proof design.
- Metal casing with corrosion protection.
- Smudge-proof finish.
- 360° swivel air nozzle.
- Overheating protection system.

SL-2500N MODEL

- Push button activation.
- Programmed operation time.
- Automatic stop after 30 seconds.


SL-2500N A MODEL

- Photo-electric cell activation.
- Photo-electric cell sensitivity control.
- Stops automatically when hands are removed.

Technical Characteristics

SL-2500N / SL-2500N A

Nominal voltage	220V / 240V 50Hz
Nominal power	2500 W
Nominal current	11,5 A
Degree of protection	IP X1
Insulation	Class I
Sound level 55 dB(A)	270 m³/h
Air speed	30 m/s
Dimensions	240 x 270 x 192 mm
Weight per unit	5,5 kg
Colour	Chrome

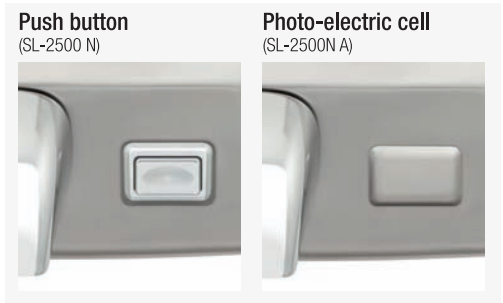

HAIR DRYERS COMET-N/COMET-P

Wall-mounted hair dryers for domestic and public
use (hotels, gymnasiums, swimming pools, etc.).
Tube-style and traditional pistol-grip versions.



Advantages COMET-N

- Easy installation
- Automatically start/stop activated by the removal/replacement of the tube.
- Timer function to prevent continued operation of the unit after use.
- Drying speed regulator
- To prevent improper use, once the unit is installed special tools will be required to remove it.
- International electrical connectors (110V - 230V).



Advantages COMET-P

- Easy installation
- Practical and lightweight.
- Manual safety button, to prevent continued operation of the unit after use.
- Two drying speeds.
- To prevent improper use, once the unit is installed special tools will be required to remove it.
- International electrical connectors (110V - 230V).

Technical Characteristics

COMET-N

COMET-P

Nominal voltage	220-240V 50Hz	220-240V 50Hz
Nominal power	1000 W	1200 W
Nominal current	4,5 A	5,5 A
Degree of protection	IP 24	IP X0
Insulation	Class II	Class II
Airflow	77 m³/h	71 m³/h
Air speed	15 m/s	13 m/s
Indicator light	NO	YES
Dimensions (mm)	270 x 205 x 110	220 x 205 x 112
Tube/cable length	0,9 m	1 m
Weight per unit	3 kg	1,5 kg
Colour	White	White

