

## Product Specifications

### Description:

Aluminium tape in thickness of 0.03mm with an aluminium film and a water based acrylic adhesive.  
Used for central air-conditioning pipelines in high buildings, refrigerators, water heaters, etc.

### Construction:


A compound of an aluminium film and a water based acrylic adhesive Thickness of Aluminium foil: 0.03mm

### Application:

Used for central air-conditioning pipelines in high buildings, refrigerators, water heaters, etc.  
It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied to must be clean, dry and free of grease and oil.

### Technical date

Thickness	- 0,03 mm ( $\pm$ 10%)
Backing	- bright aluminium
Tack	- immediately
Bonding time	- max. 24 hours
Temperature range	- from -20°C to +120°C
Flammability	- DIN 4102 kl.1 B2
shelf life / storage	- max. 1 year, dry, in close packing between 5°C and 35°C

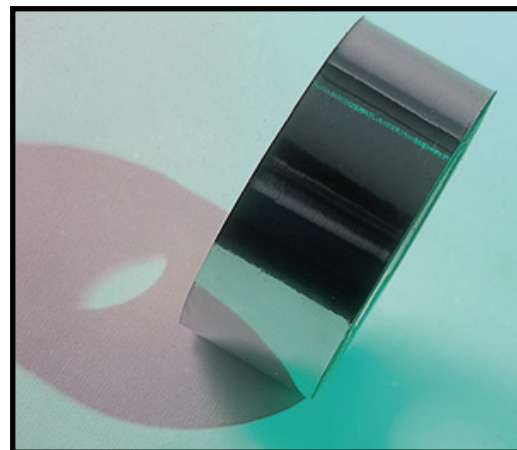

Article Number	Description	Package	Qty/Pack
431105030/50	Tape Alu 30mu - 050mm x 50 mtr	Box	24
431107530/50	Tape Alu 30mu - 075mm x 50 mtr	Box	16