

Product Specifications

Description:

A heavy duty self vulcanising sealing tape; with an aluminium backing and a strong self bonding layer (adhesive); provides a sure and lasting moisture- and sealing proof barrier against weather influences; impervious to wind, rain and snow when properly applied.

Construction:

A compound of an electrometric, modified butyl rubber adhesive. It is laminated with an 0,04mm thick aluminium foil and covered by a silicone treated foil liner.


Available in 1,0 and 0,6 mm.

Application:

Indoor and outdoor airduct sealing, it's all weather resistance is excellent, it can also be used for roof flashing and repair jobs, upon hand application, it instantly provides a sure, watertight and airtight bond which grows stronger with time, no special skill is required, drying or heating is not needed, the tape should be pressed down firmly, the work period can be substantially reduced. It can be painted over and adheres to metal, concrete, stone, plastic, wood, etc.

Technical date

Thickness	- 1,0 mm or 0,6 mm
Backing	- bright aluminium 0,04mm
Adhesion to galv	- 2,0 kg.cm
Bonding time	- max. 24 hours
Water resistance	- excellent
Solids	- 100%
Temperature range	- from -20°C +70°C
Flammability	- DIN 4102 kl.1 B2
shelf life / storage	- max. 2 years, dry, in close packing between 5°C and 35°C

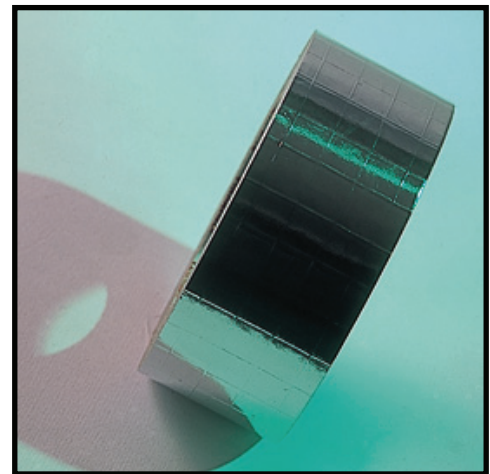

Article Number	Description	Package	Qty/Pack
4352050/24	Tape Vulc. ALU - 50mm x 15 mtr	Box	24
4352075/16	Tape Vulc. ALU - 75mm x 15 mtr	Box	16

ATCO-Europe B.V.
 Lubeckstraat 26 7575 EE Oldenzaal
 P.O. Box 382, 7570 AJ Oldenzaal
 The Netherlands
 Tel. +31-541-530771
 FAX +31-541-532093
 Email: info@atco-europe.com
 Web: www.atco-europe.com