

Product Specifications

Description

A heavy duty self vulcanising duct sealing tape, it is developed to meet industry's increasing demand for airtight duct. The method of application will save up to 80% on labour costs over methods and provides an excellent airtight seal.

Construction


A compound of an elastomeric, pressure sensitive adhesive. It is laminated with an extendable 0,03 mm thick polyethylene foil and further covered by a paper release liner.

Application

Air duct sealing, especially recommended for round or oval ducts. The tape has an immediate high "tack" and bonds within 24 hours. Once applied the tape provides a superb adhesion on galvanized or aluminium, for maximum adhesion the surface must be clean and free of moisture and foreign contamination (commercially clean), a remote trace of moisture will seriously affect adhesion, do not stretch over 80%, the tape should be pressed down firmly. Please read our application instructions as enclosed in the packing carefully

Technical data

Thickness	- 0,95 mm (± 3%)
Backing	- PE dark grey colour
Tack	- immediately
Bonding time	- max. 24 hours
Adhesion to galv	- 3,6 kg/cm
Solids	- 100%
Pressure rating	- 4000 Pa
Temperature range	- from -20°C +60°C
Flammability	- DIN 4102 kl.1 B2
shelf life / storage	- max. 2 years, dry, in close packing between 5°C and 35°C

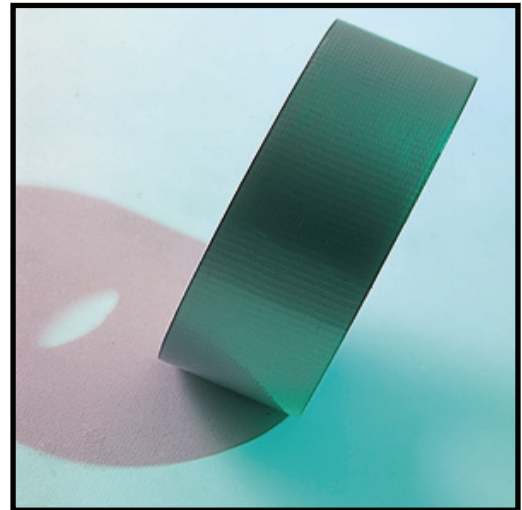

Article Number	Description	Package	Qty/Pack
4351050/24	Tape Vulc. PE - 50mm x 15 mtr	Box	24
4351075/16	Tape Vulc. PE - 75mm x 15 mtr	Box	16