


Semiconnect

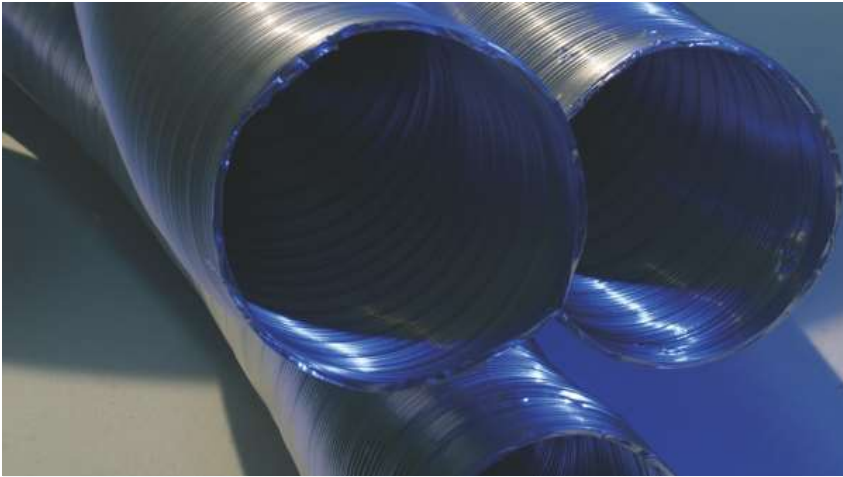

Application

The **Semiconnect** is a bendable flexible ducting in aluminium.

The **Semiconnect** products are being used for the HVAC market as well as for various industrial purposes.

Construction

Alu 1-layer: Spirally produced ducting of one layer of aluminium foil.

	Semiconnect Alu 1-layer
Product group	1.5.1
Duct material	Aluminium
Diameter range	76/305 mm
Temperature range	-30/+280 °C
Max. air velocity	25 m/sec
Max. working pressure	2000 Pa.
Standard length	3 mtr
Compressed length	0.8 mtr

The information contained herein is given in good faith. However, since application conditions are beyond our control, we cannot assume responsibility for any risks or liabilities, which may result from the use of these products. The company reserves the right to modify data without prior notice.