

ΕΞΑΕΡΙΣΤΗΡΕΣ ΑΕΡΑΓΩΓΩΝ ΑΘΟΡΥΒΟΙ

ΣΕΙΡΑ TD SILENT

- Εξαεριστήρες χαμηλού προφίλ με ελικοφυγοκεντρική φτερωτή ειδικού σχεδιασμού.
- Κατασκευασμένοι από πλαστικό υλικό με εξωτερικό ακροκίβωτο και μοτέρ **230V 50Hz**, (TD SILENT 3V 1300 & 2000 230/50-60Hz) **2 ή 3 ταχυτήτων**.
- Διαθέτουν φλάντζες προσαρμογής και στις δύο πλευρές (άπαγωγή και προσαγωγή) με ελαστικούς δακτυλίους σφράγισης και κλιπ σύνδεσης.
- Προστασία μοτέρ **IP44**, **Κλάση Β**. Θερμικό προστασίας.
- Με διπλό ηχομονωμένο κέλυφος.

i Παγκοσμίως ο πιο αθόρυβος εξαεριστήρας στην κατηγορία του

*** ΕΦΑΡΜΟΓΕΣ:** Σε κάθε εγκατάσταση που απαιτείται χαμηλή στάθμη θορύβου.

ΡΥΘΜΙΣΗ: Με διακόπτη 2 ταχυτήτων **REGUL -2** ή διακόπτη 3 ταχυτήτων **INTER 4P**. Ροοστάτη **REB 1** ή **REB 2,5**.

IN LINE SILENT FANS



Ο πιο αθόρυβος εξαεριστήρας του κόσμου στην κατηγορία του!



Καρπύλες απόδοσης στις τεχνικές σελίδες του καταλόγου.

ΤΥΠΟΣ	ΣΤΡΟΦΕΣ rpm	ΙΣΧΥΣ W	ΡΕΥΜΑ A	ΠΑΡΟΧΗ ΑΕΡΑ m³/h	ΘΕΡΜΟΚΡΑΣΙΑ ΛΕΙΤΟΥΡΓΙΑΣ °C	dB(A) 3m	ΔΙΑΜΕΤΡΟΣ Ømm	ΒΑΡΟΣ kg	ΡΥΘΜΙΣΗ
TD-160/100N SILENT 2V	2400	29	0,17	180	-20/+40	24	100	1,4	REB 1
	2200	18	0,11	150		22			REGUL 2
TD-250/100 SILENT 2V	2210	27	0,12	250	-20/+40	25	100	5,4	REB 1
	1680	21	0,10	200		20			REGUL 2
TD-350/125 SILENT 2V	2100	27	0,12	330	-20/+40	23	125	5	REB 1
	1650	21	0,10	260		18			REGUL 2
TD-500/150 SILENT 3V TD-500/160 SILENT 3V	2480	59	0,26	550	-20/+60	27	150 160	6	REB 1
	2060	50	0,22	450		22			INTER 4P
	1610	45	0,20	350		17			
TD-800/200 SILENT 3V	2170	102	0,50	910	-20/+60	28	200	8,7	REB 1
	1870	92	0,47	780		24			INTER 4P
	1660	90	0,46	690		22			
TD-1000/200 SILENT 3V	2450	130	0,55	1040	-20/+60	29	200	8,7	REB 1
	2210	127	0,55	910		27			INTER 4P
	1920	122	0,53	790		24			
TD-1300/250 SILENT 3V	2530	204	0,85	1320	-20/+60	36	250	20	REB 1
	2230	163	0,68	1160		33			INTER 4P
	2030	144	0,60	1040		31			
TD-2000/315 SILENT 3V	2670	293	1,25	1770	-40/+60	39	315	25	REB 2,5
	2490	232	0,97	1610		38			INTER 4P
	2240	190	0,78	1480		36			

DIMENSIONS TD SILENT (mm)

[illegible]

Technical drawing of the 1000 series motor, showing side and front views with dimensions:









- Side View (Left):** Shows the motor's profile with dimensions:
 - $\varnothing B$: Total diameter.
 - $\varnothing 5,4$: Pin diameter (indicated by a leader line).
 - F : Distance between the two mounting pins.
 - A : Total length of the motor.
 - G : Thickness of the motor housing.
- Front View (Right):** Shows the motor's face with dimensions:
 - $\varnothing D$: Outer diameter of the front flange.
 - E : Thickness of the front flange.
 - C : Total width of the motor.
 - H : Distance from the center of the motor to the center of the mounting pin.

* It provides an additional rubber gasket for installation in 160 mm ducts.

	A	B	C	D	E	F	G	H
TD-1300/250 SILENT	680	248	331	387	140	200	280	171
TD-2000/315 SILENT	825	312	373	432	152	260	335	192

ΚΑΜΠΥΛΕΣ TD-SILENT


PERFORMANCE CURVES TD-SILENT

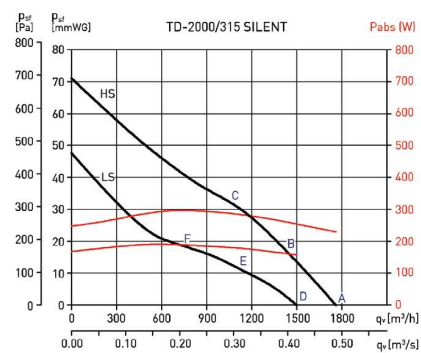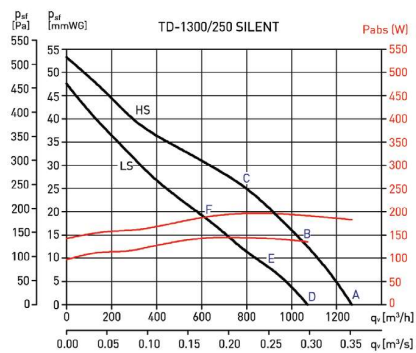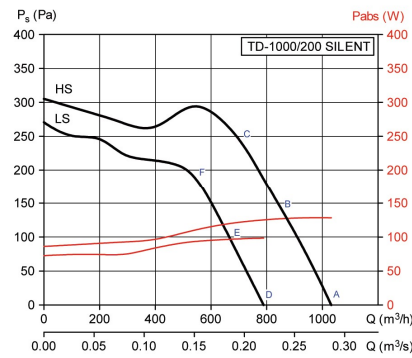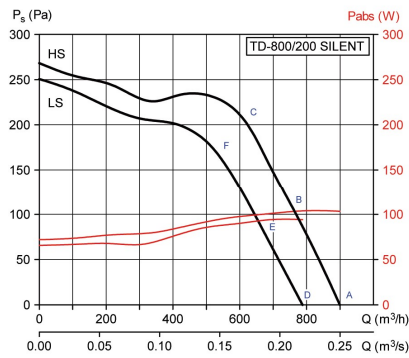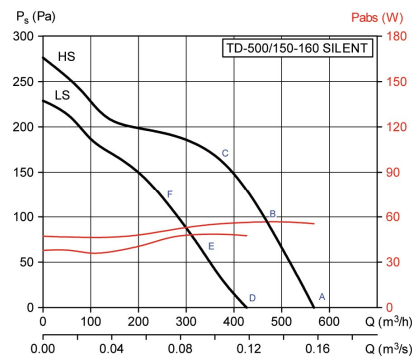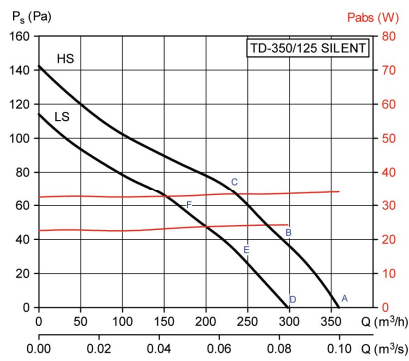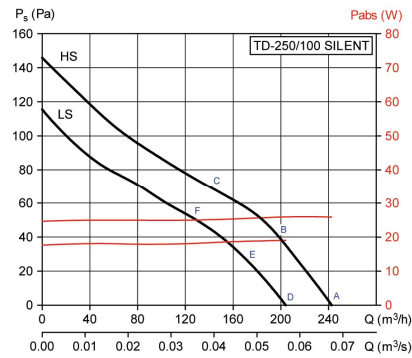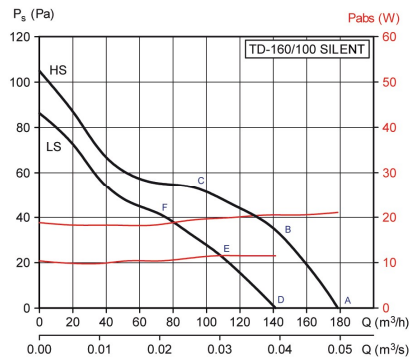


ΔΙΑΣΤΑΣΕΙΣ TD SILENT (mm)

DIMENSIONS TD SILENT

TD-160/100 N SILENT

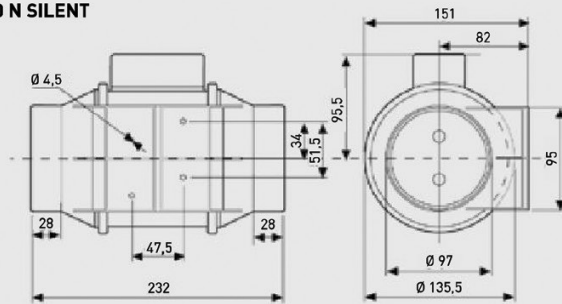


TD-SILENT 250 to 1000

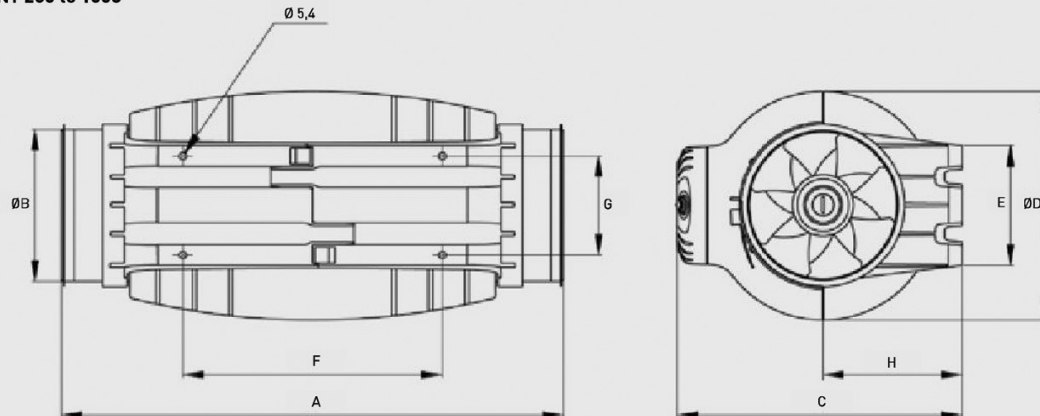

	A	ØB	C	ØD	E	F	G	H
TD-250/100	575	97	252	204	100	250	83	121
TD-350/125	462	123	252	204	100	250	83	121
TD-500/150-160*	484	147	274	221	116	250	96	134
TD-800/200	568	198	327	264	145	340	129	164
TD-1000/200	568	198	327	264	145	340	129	164

* It provides an additional rubber gasket for installation in 160 mm ducts.

TD-SILENT 1300 and 2000

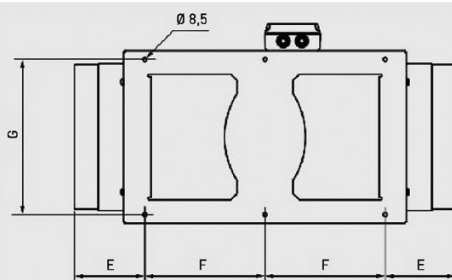

	A	B	C	D	E	F	G	H
TD-1300/250 SILENT	680	248	331	387	140	200	280	171
TD-2000/315 SILENT	825	312	373	432	152	260	335	192

