



ARTIC-405 PM GR



ARTIC-405 PRC GR

Wall fans with 3 speed controller, timer and detachable proof guard.

Characteristics

- The ARTIC-405 PM GR model is equipped with two pullcords that facilitate speed control and fan swing.
- The ARTIC-405 PRC GR model includes remote control and BREEZE and NIGHT functions.

Breeze Function

The fan alternates different speeds simulating a natural breeze. Figure 1 shows the operating cycle for the various speeds that can be selected.

Night Function

The fan alternates between the various Breeze functions, as explained below:

When the NIGHT function is selected	The fan goes through the following cycle:	
Slow Speed	BREEZE	Slow Speed (Permanent)
Medium Speed	BREEZE	Medium Speed (30 min.) Slow Speed (Permanent)
High Speed	BREEZE	High Speed (30 min.) Medium Speed (30 min.) Slow Speed (Permanent)

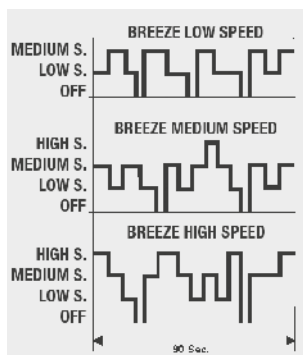


Figure 1



Artic 405 PM GR: speed controller and timer.

Artic-405 PRC GR: remote distance.

TECHNICAL CHARACTERISTICS

Model	Voltage 50Hz (V)	Nominal power (W)	Intensity (A)	Maximum airflow* (m ³ /h)	Maximum air output speed (m/s)	Maximum sound power level (dB(A))	Adjustable timer	N° speeds	Remote distance (with support wall)	Fan position		Motor with thermal protection	Cable length (mm)	Colour	Weight (kg)	Dimensions (mm)		Wiring diagram** (n°)
										Inclinable	Fixed / oscillating					Ø Propeller	Height	
ARTIC-405 PM GR	230	50	0,22	3.300	2,65	62	10 to 180 min.	3		•	•	•	1.500	Grey	5	400	560	37
ARTIC-405 PRC GR	230	50	0,22	3.300	2,65	62	1 a 8h	3	•	•	•	•	1.500	Grey	5	400	560	37

* The indicated airflow include induced airflow.
** See section of Wiring Diagrams.
**according to IEC 60879 regulation.