


LOW PRESSURE CBM SMALL

ΦΥΓΟΚΕΝΤΡΙΚΟΙ ΕΞΑΕΡΙΣΤΗΡΕΣ ΧΑΜΗΛΗΣ ΠΙΕΣΗΣ
ΣΕΙΡΑ CBM small

- Σειρά ανεμιστήρων μονής και διπλής αναρρόφησης
- 230V/50Hz, μοτέρ 2 ή 4 πόλων.
- Από γαλβανισμένο χαλυβδοέλασμα προστατευμένο με μαύρο εποξικό χρώμα.
- Όλοι οι τύποι με φτερωτή siroco
- Όλοι οι τύποι με μοτέρ εξωτερικού ρότορα IP:44, κλάση B και θερμικό προστασίας.


 ΚΑΤΟΠΙΝ ΑΠΑΙΤΗΣΩΣ:

Εντός ηχομονωμένου κιβωτίου (FAN SECTION).

-  **ΡΥΘΜΙΣΗ** : Με REB 5000W εκτός των 2πολικών τύπων που δεν ρυθμίζονται.



ΑΝΕΜΙΣΤΗΡΑΣ
ΕΝΤΟΣ FAN SECTION

ΤΥΠΟΣ	ΑΠ. ΙΣΧΥΣ WATT	ΣΤΡΟΦΕΣ rpm	ΠΥΚΝΩΤΗΣ μF/V	MAX Ampere	ΠΑΡΟΧΗ ΑΕΡΑ m³/h	ΘΕΡΜΟΚΡΑΣΙΑ °C	dB(A)	ΒΑΡΟΣ kg	ΤΙΜΗ €	
									ΕΞΑΕΡΙΣΤΗΡΑΣ	ΕΞΑΕΡΙΣΤΗΡΑΣ ΕΝΤΟΣ FAN SECTION
ΜΟΝΗΣ ΑΝΑΡΡΟΦΗΣΗΣ 2 ΠΟΛΩΝ										
CBM/2-133/046 - 90W	90	2100	2/400	0,4	260	-15/+70	58	1,8		
CBM/2-133/062 - 100W	100	1650	2/400	0,4	290	-15/+40	55	1,9		
CBM/2-140/059 - 100W	100	1350	2/400	0,5	390	-15/+40	48	2,6		
CBM/2-140/059 - 155W	155	2300	5/400	0,7	510	-15/+70	60	3,4		
CBM/2-160/062 - 260W	260	2100	6/400	1,1	630	-15/+40	62	4		
ΜΟΝΗΣ ΑΝΑΡΡΟΦΗΣΗΣ 4 ΠΟΛΩΝ										
CBM/4-160/062 - 70W	70	1320	2/400	0,3	450	-15/+60	55	3		
CBM/4-180/075 - 115W	115	1330	3/400	0,6	650	-15/+55	59	3,5		
CBM/4-180/092 - 160W	160	1275	6/400	0,8	970	-15/+40	57	6,5		
ΔΙΠΛΗΣ ΑΝΑΡΡΟΦΗΣΗΣ 2 ΠΟΛΩΝ										
CBM/2-133/190 - 185W	185	1750	5/400	0,8	630	-15/+45	57	3,5		
ΔΙΠΛΗΣ ΑΝΑΡΡΟΦΗΣΗΣ 4 ΠΟΛΩΝ										
CBM/4-133/190 - 70W	70	1150	2/400	0,3	640	-15/+65	47	2,8		
CBM/4-160/150 - 125W	125	1150	3/400	0,6	800	-15/+65	54	3,7		
CBM/4-180/184 - 150W	150	1250	5/400	1,1	1.330	-15/+60	57	5		
ΔΙΠΛΗΣ ΑΝΑΡΡΟΦΗΣΗΣ 6 ΠΟΛΩΝ										
CBM/6-180/184 - 95W	95	850	2/400	0,5	970	-15/+40	48	5		










ΚΑΜΠΥΛΕΣ ΑΠΟΔΟΣΗΣ CBM SMALL

PERFORMANCE CURVES CBM SMALL

PERFORMANCE CURVES

- q_v : Airflow in m^3/h .
- p_{st} : Static pressure in Pa.
- SFP: Specific fan power in $W/m^3/s$.
- I: Absorbed power A.
- LW: Sound power levels, at inlet, in dB(A).
- Measurement category: B.
- Efficiency category: total.
- Fan efficiency without speed control.
- Airflow data in accordance with ISO 5801.

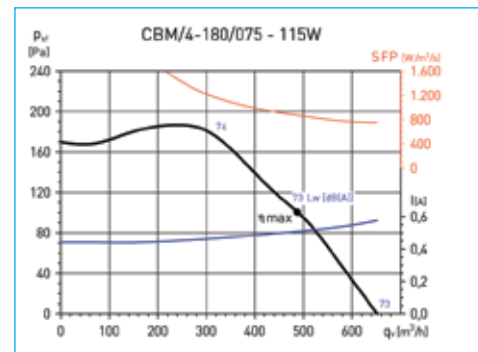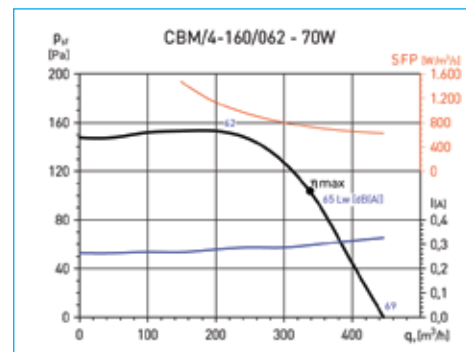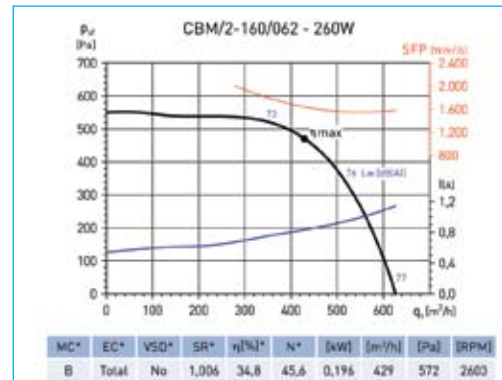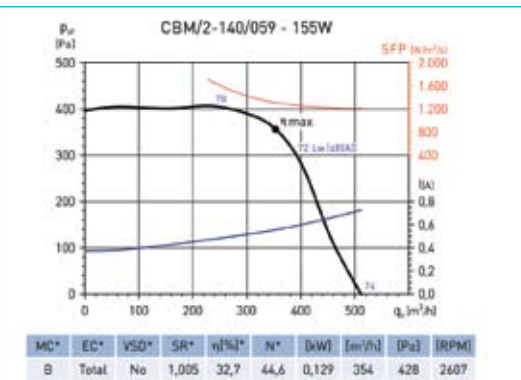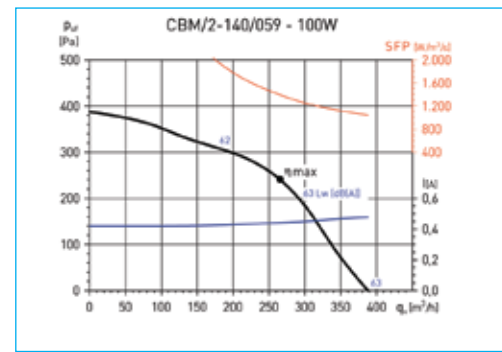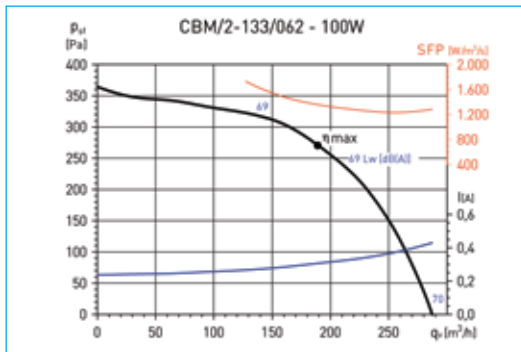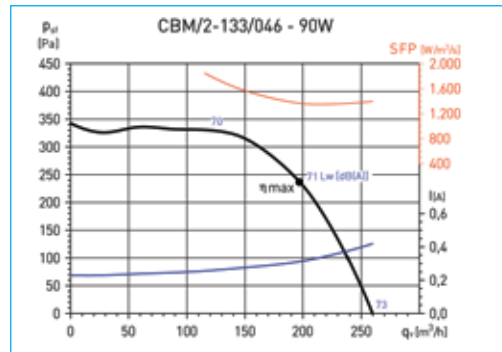

ΚΑΜΠΥΛΕΣ ΑΠΟΔΟΣΗΣ CBM SMALL

PERFORMANCE CURVES CBM SMALL

