


ΚΑΜΠΥΛΕΣ ΑΠΟΔΟΣΗΣ CBM

PERFORMANCE CURVES CBM


PERFORMANCE CURVES - Three-phase motors

- p_{st} : Static pressure in Pa.
- q_v : Airflow in m^3/h and m^3/s .
- SFP: Specific fan power in $W/m^3/s$.
- I: Absorbed current A.
- Measurement category: B.
- Efficiency category: total.
- Fan efficiency without VSD.
- Air flow data in accordance with ISO 5801.

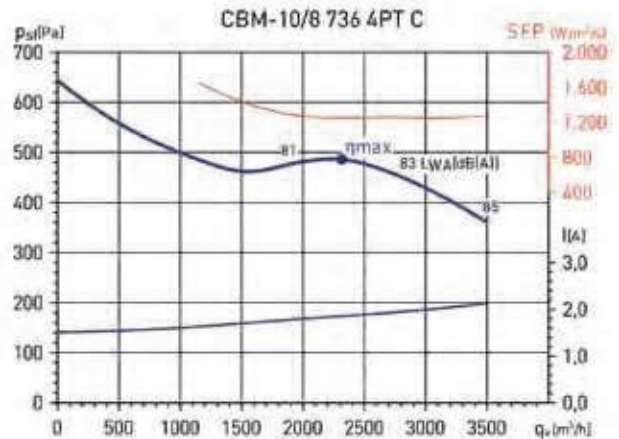


MC*	EC*	VSD*	SR*	η[%]*	N*	[kW]	[m³/h]	[Pa]	[RPM]
B	Total	No	1	42,2	49,1	0,803	2310	527	1351

* See example curve.

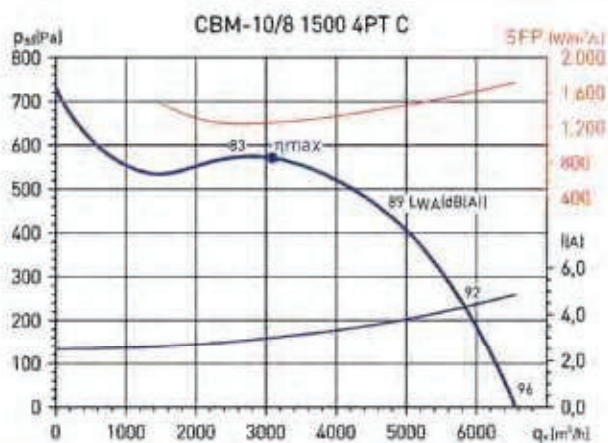


MC*	EC*	VSD*	SR*	η[%]*	N*	[kW]	[m³/h]	[Pa]	[RPM]
B	Total	No	1	51,1	57,2	1,075	3081	642	1459

* See example curve.

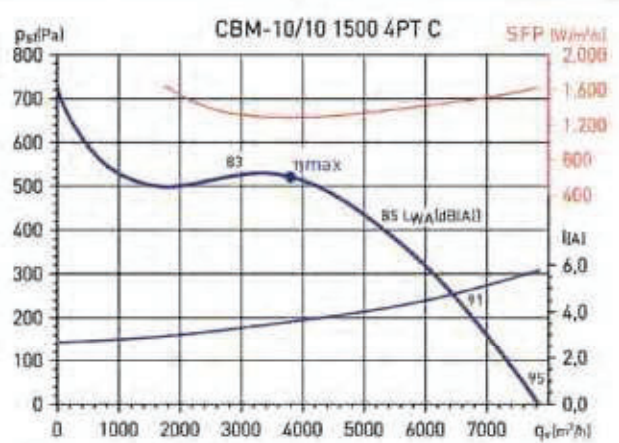


MC*	EC*	VSD*	SR*	η[%]*	N*	[kW]	[m³/h]	[Pa]	[RPM]
B	Total	No	1	45,7	51,2	1,355	3801	587	1462

* See example curve.

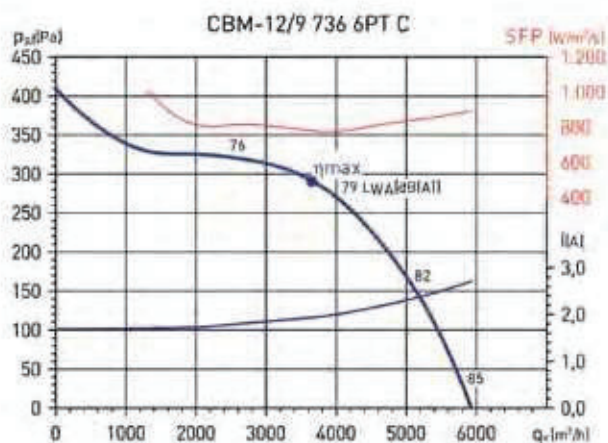

MC*	EC*	VSD*	SR*	η[%]*	N*	[kW]	[m³/h]	[Pa]	[RPM]
B	Total	No	1	44,9	51,9	0,784	3657	347	899

* See example curve.

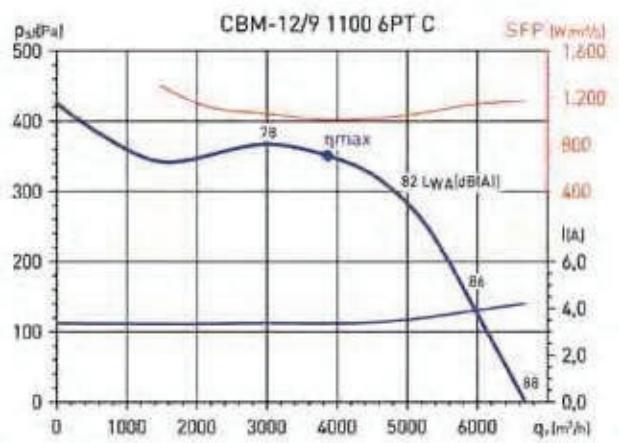

MC*	EC*	VSD*	SR*	η[%]*	N*	[kW]	[m³/h]	[Pa]	[RPM]
B	Total	No	1	40,7	46,8	1,088	3867	412	941

* See example curve.