


SEAT SERIES

SEAT 20

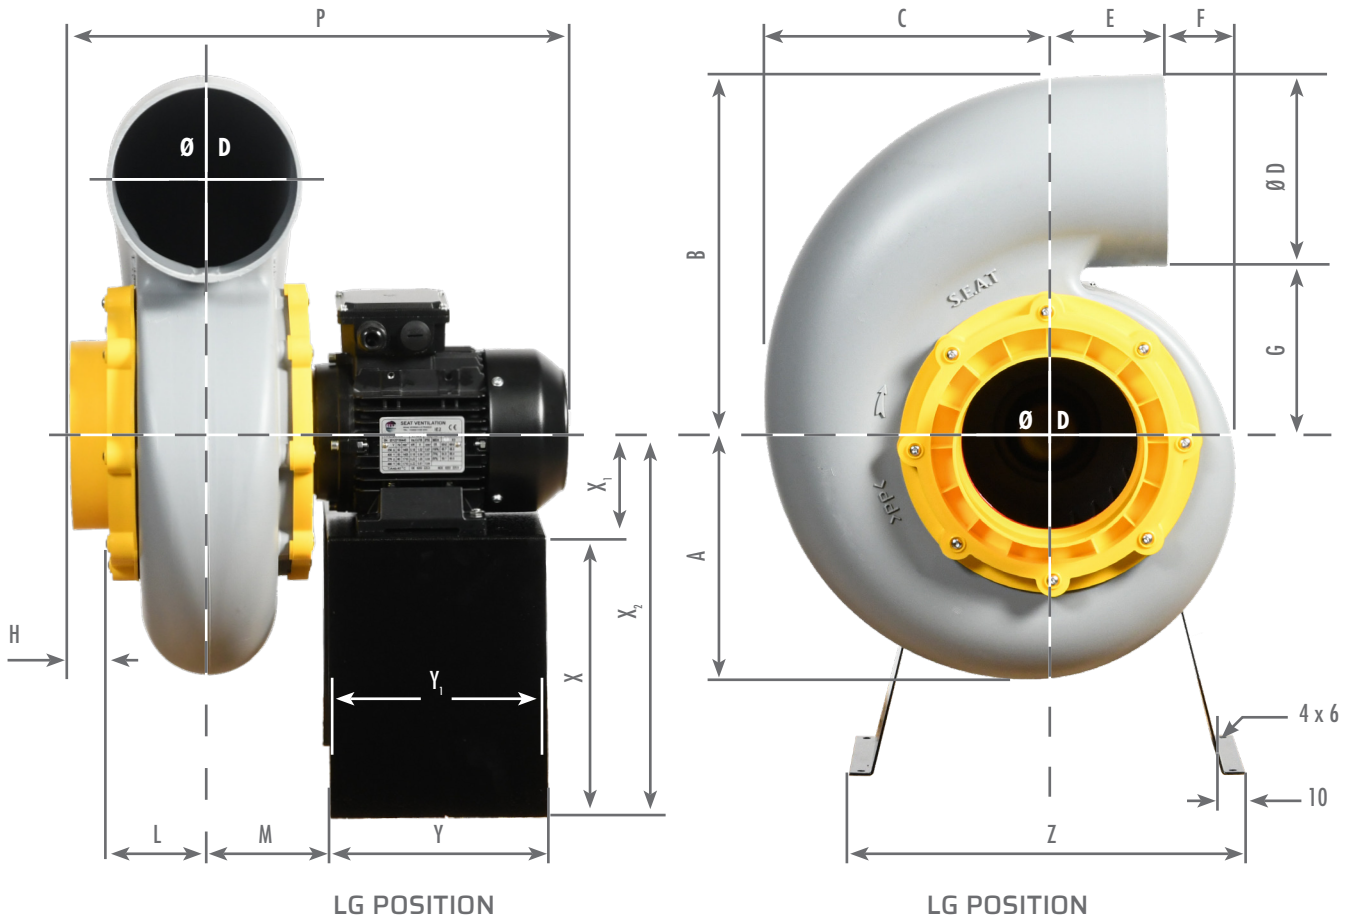


Available in  

Dimension (mm) - Metal stand not included (see accessories)																
A	B	C	ØD	E	F	G	H	L	M	P	Y	Y ₁	Z	X	X ₁	X ₂
208	303	240	160	100	57	143	32	84	94	390	180	160	340	240	71	311

Left Rotation (Counter-Clockwise)



Right Rotation (Clockwise)

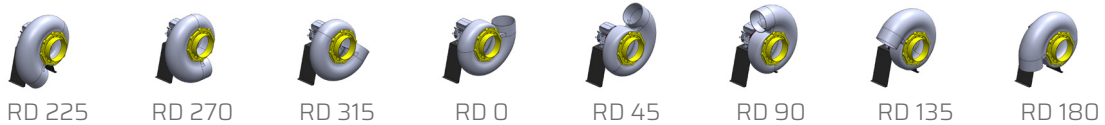


NOISE LEVELS

Speed T/min	Acoustic (dB)				Frequency Octave (Hz)							
	Qv (m ³ /h)	Sp (Pa)	LwA dB(A)	LpA* dB(A)	63	125	250	500	1000	2000	4000	8000
1450	760	188	76	56	93	76	80	73	66	55	53	46
2870	1500	735	91	70	108	91	95	88	81	70	67	61

*Acoustic pressure Lp at 3 meters - Outlet acoustic data available on request.

SEAT SERIES - SEAT 20

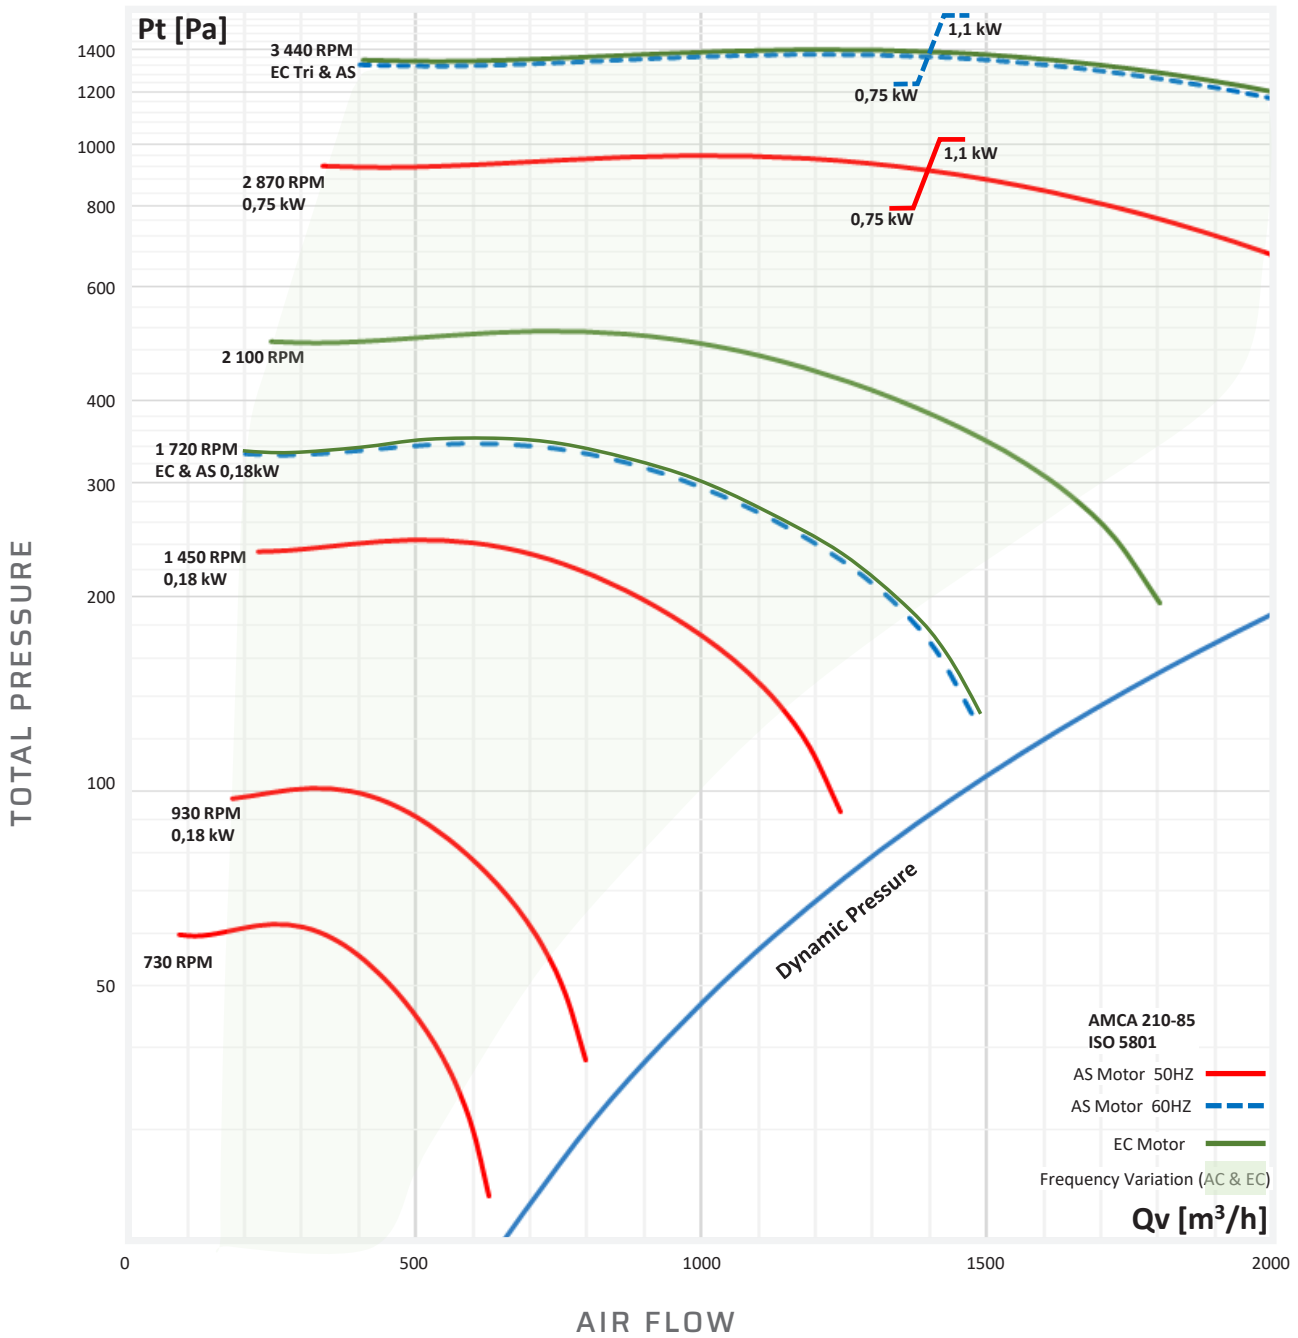

ELECTRICAL FEATURES

Motor	Power (kW)	Motor RPM	Voltage (V)	Intensity (A)	Weight (kg)	Reference Number
IP55 Asynchronous Single-Phase	0,18	1450	230	1,4/1,4	9,3	51202010
	0,75	2870	230	4,8/4,8	10,5	51203010
	1,1	2870	230	6,65	11	51203011
IP65 EC Single-Phase	0,6	1720	220/277	4,30	9,2	52202010
	0,6	2100	220/277	4,30	8,3	52203010
IP55 Asynchronous Three-Phase	0,18	930	230/400	1,64/0,94	8,23	51201000
	0,18	1450	230/400	1,09/0,63	9	51202000
	0,75	2870	230/400	2,85/1,64	12,5	51203000
	1,1	2870	230/400	4,02/2,31	13,5	51203001
IP66 EC Three-Phase	1,2	3440	360/460	2,7	9	52202000
IP55 Asynchronous Three-Phase ATEX	0,18	1450	230/400	1,13/0,65	7,9	51202003
	0,75	2870	230/400	3,46/2	13,5	51203003

Mandatory PTC Sensor for ATEX motor with Frequency Inverter.