

KAFFE S.A.

VENTILATION CENTER

Tel.: +30 210 2850573
Fax: +30 210 2849028

www.kaffe.gr
www.ventilation.gr
e-mail: info@kaffe.ar

CENTRIFUGAL FANS

SERIES FKK-900

- Fan casings are from robust galvanized sheet steel finished with electrostatic paint coating.
- Impellers are semi-backward curved "spoon type" that allows the easy cleaning and maintenance.
- Motors could be 230V/50Hz or 400V/50Hz.
- Motor speed 1400RPM or 900RPM.
- IP:55 protection- Class F insulation



APPLICATIONS: Especially designed for commercial and industrial kitchens where high system resistances are present as system with filters, dampers etc.

ELECTRICAL ACCESSORIES: Speed controllable in 230V with REB-5000W and in 400V with INVERTER.

UPON REQUEST: The fan can be placed inside an acoustic box. The color is upon request.

FKKB=230V/50Hz

FKKT=400V/50Hz

/6= 900RPM


➔ 2.500 - 16.000 m³/h

TYPE	HP	Inlet diameter Ømm	Motor speed rpm	AIR FLOW m ³ /h	VOLT	PRICE €
FKKB/6-250/050	0,5	250	950	4.000	230	
FKKT/6-250/050					400	
FKKB/6-300/100	1	300	950	6.000	230	
FKKT/6-300/100					400	
FKKB/6-300/150	1,5	300	950	8.000	230	
FKKT/6-300/150					400	
FKKB/6-350/200	2	350	950	10.000	230	
FKKT/6-350/200					400	
FKKT/6-400/300	3	400	950	11.000	400	
FKKT/6-450/550	5,5	450	950	16.000	400	


FAN INSIDE AN ACOUSTIC BOX



TYPICAL INSTALLATION

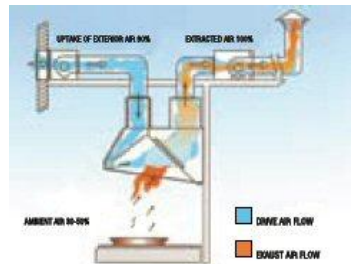

HANDING POSITIONS

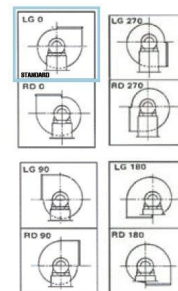

EN ISO 9001:2000